



AS-25 MINIMAL SLIDING SYSTEM

ANY
RAL
COLOUR

DUAL
COLOUR
OPTION



FEATURES

- » Minimal and innovative design with only 25mm of visible aluminium face width at the interlocking profile
- » Green buildings design thanks to the exceptional energy efficiency of the system
- » Easy to clean frame, with invisible water evacuation and less visible depth
- » Great ease of use and high functionality
- » Wide variety of typologies
- » Enhanced security with multipoint Locking
- » Sash height can be increased by adding additional reinforcement in the interlocking
- » Exceptional quality with certified performance
- » Convenient flat pack assembly

APPLICATION

Residential «
Retail/Commercial «
Hospitality «

Technical Performance

Finish	Marine quality polyester powder coat as standard*
U Value	1.3 W/m ² K (When using a 0.8 W/m ² K centre pane)
Air	Class 4, 600Pa
Water	Class 9A, 600Pa
Wind	Class 3, 1200Pa



U Value
1.3W/m²k



Water
600Pa



Interlock
25mm



Wind
1200Pa



Max Sash Wt
180kg





Air
600Pa





Max Height
4800mm

2 TRACK CROSS SECTION

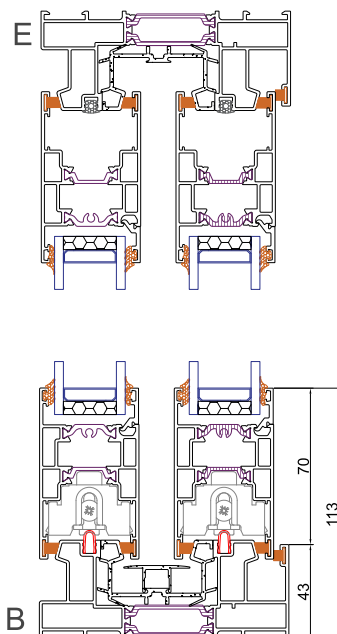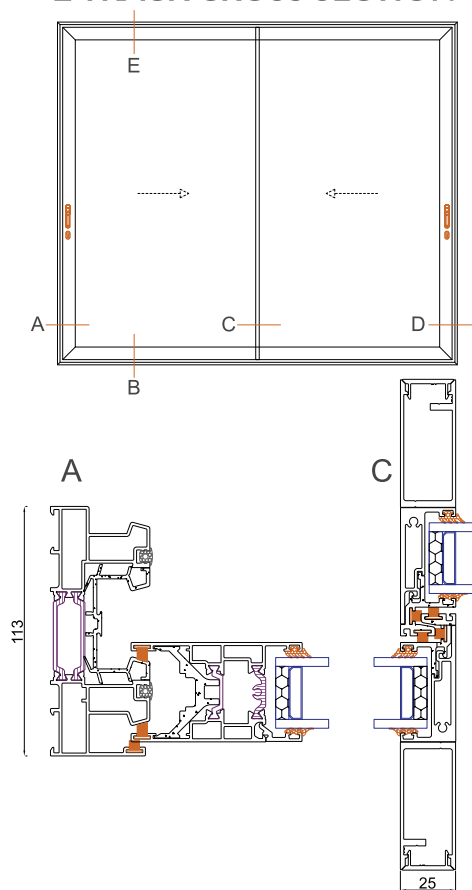

3 TRACK CROSS SECTION

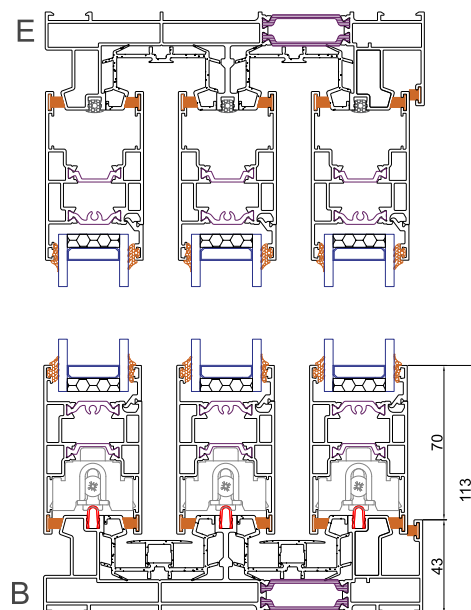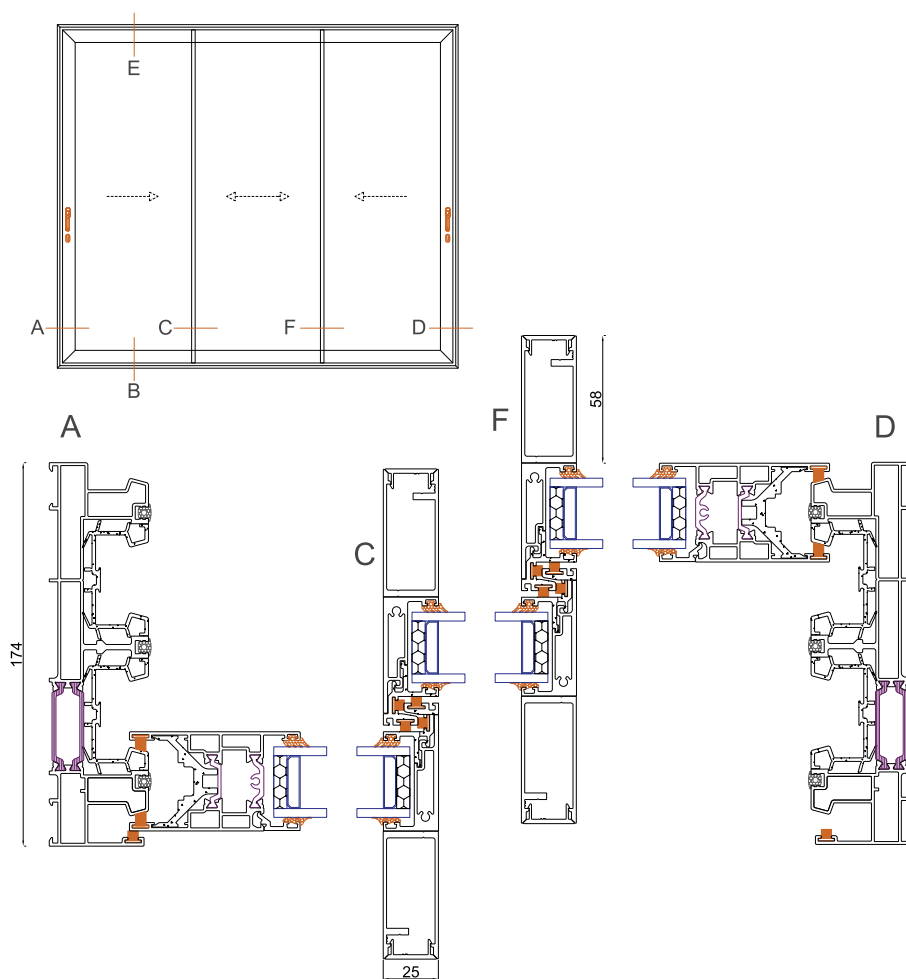

01923 510 220



info@astonaa.co.uk



01923 396 720



www.astonaa.co.uk

Aston Architectural Aluminium Limited

Unit 8 Byfleet Industrial Estate

Old's Approach, Watford,

WD18 9TS